

TRADITIONAL DOOR DESIGN AND MILLWORK



261 Regina Rd., Woodbridge, Ont, L4L 8M3
Tel 416.747.1992 Fax 905.850.3581


Warranty Coverage

APPROPRIATE EXPOSURE

Placement is a major factor in determining your door's maintenance and longevity. To adequately protect it and extend its life, you need to consider the direction your door will be facing which will determine the amount of overhang and the height of the entrance in relation to the base of the door. There are some situations where the exposure can be too extreme for a wood door.

EXPOSURE COEFFICIENT

Here is a simple formula that will help you figure out the **correct overhang** required for your door. Please refer to the following illustration and the chart for assistance in determining the appropriate overhang for your door.

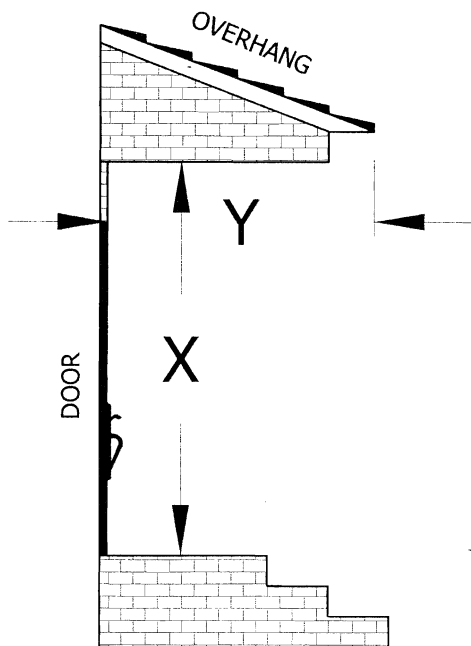

X = distance from bottom of door to
base of overhang

Y = overhang distance requirement

DIRECTION YOUR DOOR FACES			
North	South	East	West
Y= 1/2X	Y= X	Y= 1/2X	Y= X

Wood doors without adequate overhangs may experience problems such as rapid finish deterioration, colour fading, wood splitting, warping, moulding shrinkage, wood joint separation, and water penetration between mouldings, panels and glass.

Without the minimum overhang requirement (Y), wood doors and all exterior prehung system components are NOT covered under Traditional Door's Warranty.

MAINTAINING YOUR DOOR

You may be required to perform periodic maintenance which is not part of your Traditional Door warranty. Maintenance may be required at any time and may include maintaining the exterior finish and/or trimming swollen wood products. Required maintenance may vary depending on environmental conditions in your area and the distance of your overhang.